Transmission Maintenance



Trans-X[®] Slip-Stop & Leak Fix

Quickly eliminates leaks, restores smooth shifting and prevents future leaks in automatic transmissions. Conditions seals.

402015 15 fl. oz. can 402032 30 fl. oz. can 402033 32 fl. oz. bottle


Trans-X® for Trucks 402035 32 fl. oz. can



Trans-X® High Mileage **Automatic Transmission Treatment**

Developed for vehicles with 75,000 miles or more. High tech formula extends transmission life, restores viscosity, lowers temperatures and stops leaks in automatic transmissions.

402916 16 fl. oz.

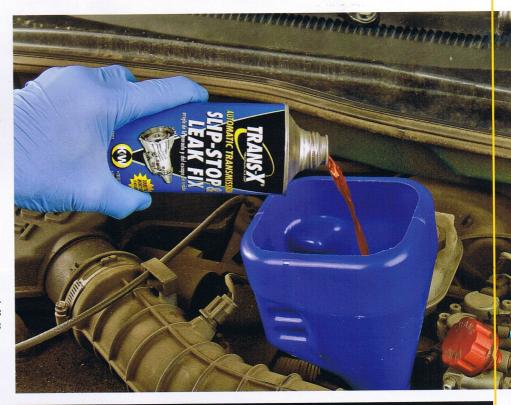

K&W Trans-X® Slip-Stop & Leak Fix eliminates leaks and restores shifting.



CRC

Trans-Kleen™ **Automatic Transmission Treatment**

Cleans harmful gums and varnishes while you drive. Smooths shifting and eliminates hesitating, creepage, and betweenspeeds lurching.

05332

12 fl. oz.



MOPAR ATF+3® Transmission Fluid

Use where Chrysler spec MS7176E is required. Resists high-temperature breakdown and provides long lasting lubrication.

ST.2342 32 fl. oz.

MOPAR ATF+3® is a registered trademark of Chrysler Corporation.



Trans-X® Premium ATF with Synthetic Conditioners

DEXRON® III/MERCON® compatible. Synthetic additives increase thermal stability by minimizing viscosity changes. Reduces harmful fluid oxidation caused by heat, friction, speed, load and extreme temperatures.

402132

32 fl. oz.

DEXRON® is a registered trademark of General Motors Corporation. MERCON® is a registered trademark of Ford Motors Company.

Differential Additives



Trans-X[®] Posi-Trac[®] **Limited Slip Gear Oil Additive**

Maintains smooth operation of the limited-slip unit and reduces friction, wear and overheating while eliminating chatter. Meets GM, Ford and Chrysler specifications.

402508 7 fl. oz.



Equa-Torque® **Differential Friction Modifier**

Stops chattering, jerking and slipping on axles with traction equalizers, limited-slip and posi-traction differentials. Meets GM, Ford and Chrysler specifications.

SL2411 4 fl. oz. (12/cs) 4 fl. oz. (36 pcs) ST.2411B

